

Technical Datasheet

DIN Ball Valves 916N

JC
VALVES


The quality option



sales@jc-valves.com

www.jc-valves.com

DIN Ball Valves F l o a t i n g

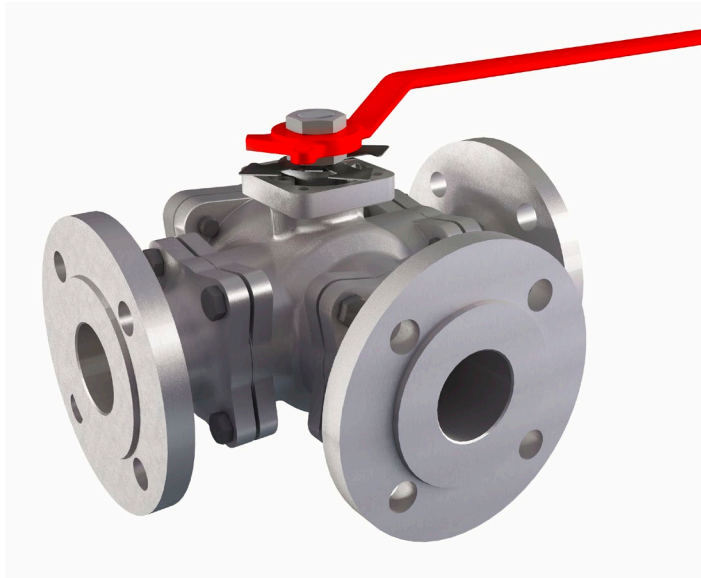

- Valve design: Full Bore EN 1983 / EN ISO 17292
- Body design: EN 12516
- Shell thickness: EN ISO 17292
- Flanges: DIN 2501 / EN 1092-1
- Face to face dimensions: Manufacturer Standard
- Marking: EN 19 / CE - PED / MSS SP-25
- Pressure testing: EN 12266
- Shell finishing quality: MSS SP 55
- ISO 5211

Certifications

Company Certifications


- ISO9001 Quality Management System
- ISO14001 Environmental Management System
- AD2000-Merkblatt W0/A4

Product Certificates

- PED 2014/68/EU - CE marking
- ATEX 2014/34/EU– (II2GD)
- Russian Federation Certificate TRCU 10, TRCU 12, TRCU 32
- Food processing and pharmaceutical industry FDA, USP CLASS VI COMPLIANCE (CE 1935/2004) - *Optional*
- Safety Integrity Level (SIL) LEVEL 3 IEC 61508
- German type test certificate AR 216-21

DIN Ball Valves

F l o a t i n g




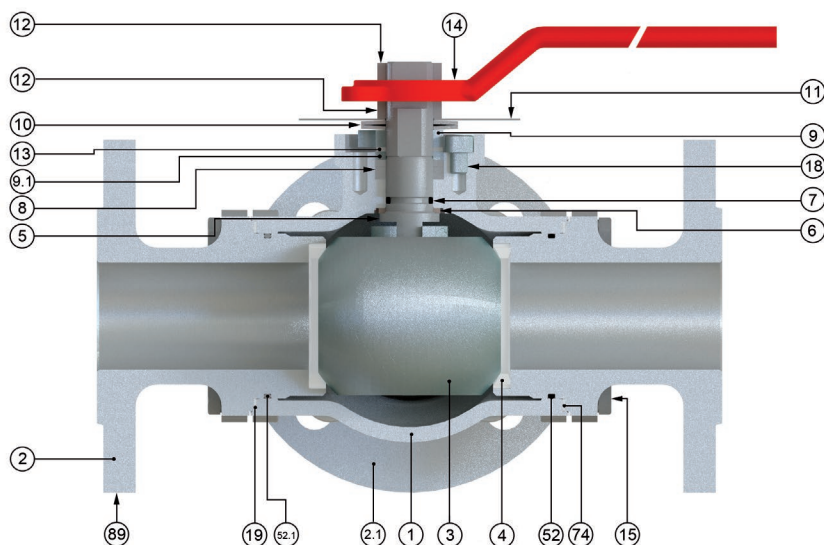


Other materials upon request

Item	Description	Material	
		A.I.T	I.I.T
1 / 2	Body / Body Connector	1.0619	1.4408
2.1	Side Cover	1.0619	1.4408
3	Ball	ASTM A351 Gr. CF8M	
4	Seat ring	PTFE	
5	Stem	ASTM A479 Tp. 316	
6	Stem thrust seal	25% GF PTFE	
7	O-ring	FKM	
8	Stem packing	Graphite	
9	Gland	AISI 303	ASTM A479 Tp. 316
9.1	Stop plate	Carbon St.	
10	Disk spring	Carbon St.	ASTM A666 Tp.301
11	Locking washer pointer	Rilsan Coated Carbon St.	
12	Gland nut	Zinc plated carbon steel	AISI 303
13	Antifriction washer	25% GF PTFE	
14	Wrench	ASTM A216 WCB	
15	Bolt	DIN 933 8.8 Zinc Bichromated	DIN 933 A4 - 70
15.1	Bolt	DIN 933 8.8 Zinc Bichromated	DIN 933 A4 - 70
18	Stop bolt	A4-70	
19	Body cover seal	PTFE	
52	O-Ring	FKM	
52.1	O-Ring	FKM	
74	Body connector seal	PTFE	
89	Identification plate	ASTM A276 Tp. 316	

DIN Ball Valves

F l o a t i n g

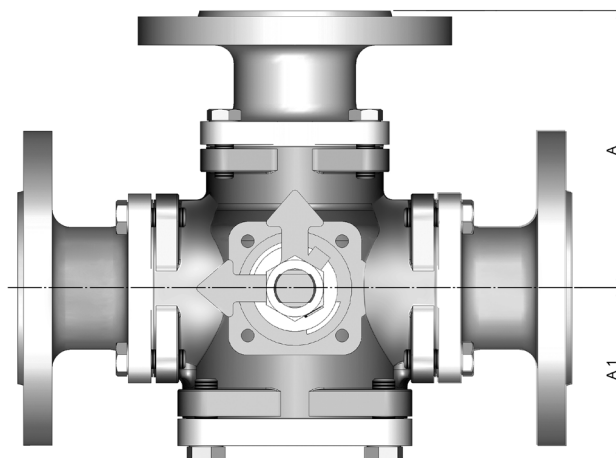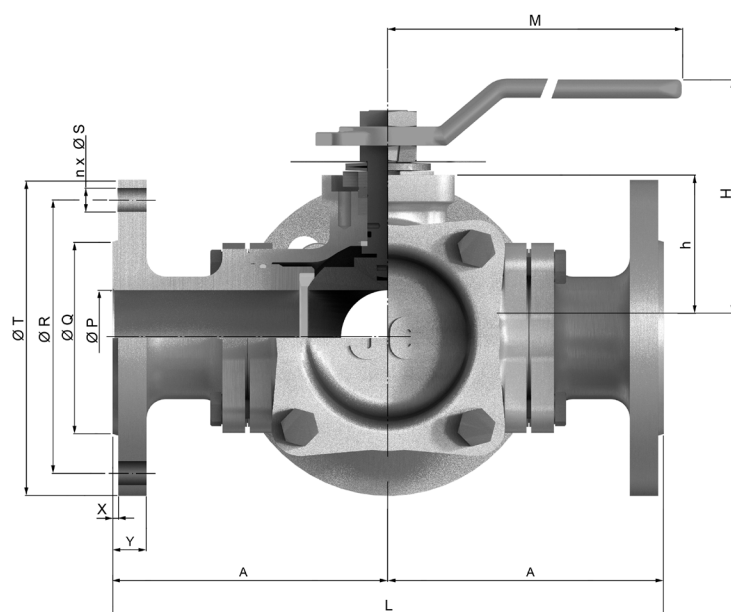

Note:
Acc. EN 1092-1

* Weight in Kg * Dimensions in mm

Series 916 (PN 16)

DN	ØP	L	A	A1	H	h	M	ØQ	ØR	n x ØS	ØT	X	Y	WEIGHT
25	25	212	106	62	96	60	170	68	85	4x14	115	2	18	8
40	40	262	131	72	121	72	200	88	110	4x18	150	3	18	17
50	50	290	145	82	134	85	350	102	125	4x18	165	3	20	25
65	65	325	162,5	97	180	101	350	122	145	8x18	185	3	18	34
80	80	370	185	107	200	122	465	138	160	8x18	200	3	20	51
100	100	430	215	138	240	146	475	158	180	8x18	220	3	20	77
150	150	500	250	189	280	182	855	212	240	8x22	285	3	22	138
200	200	600	300	270	322	255	855	268	295	12x22	340	3	24	214

Free Stem Dimensions

DN	ISO 5211	B	C	ØD	n x F	I	J
25	F05	22	12,2	50	4xM6	M12x1.5	8
40	F07	33	19,2	70	4xM8	M18x1.5	12
50	F07	34	20,2	70	4xM8	M22x1.5	15
65	F10	34	19,2	102	4xM10	M22x1.5	15
80	F10	45	27,7	102	4xM10	M28x1.5	19
100	F12	56	32,2	125	4xM12	M36x1,5	24
150	F14	69	41	140	4xM16	M48x3	32
200	F14	69	61	140	4xM16	M48x3	32

DIN Ball Valves

F l o a t i n g



Diff. Pressure 16 bar - 3 WAY L Port

DN	BTO	RTO	ETO	BTC	RTC	ETC	MAST
15	-	-	-	-	-	-	-
20	-	-	-	-	-	-	-
25	22	11	13	17	11	18	27
32	-	-	-	-	-	-	-
40	59	30	35	44	30	47	92
50	70	35	42	53	35	56	174
65	120	60	72	90	60	96	174
80	146	73	88	110	73	117	355
100	350	175	210	263	175	280	734
125	-	-	-	-	-	-	-
150	680	340	408	510	340	544	1.740
200	1.123	562	674	842	562	898	1.740

Diff. Pressure 16 bar - 3 WAY T Port


DN	BTO	RTO	ETO	BTC	RTC	ETC	MAST
15	-	-	-	-	-	-	-
20	-	-	-	-	-	-	-
25	20	10	12	15	10	16	27
32	-	-	-	-	-	-	-
40	57	29	34	43	29	46	92
50	65	33	39	49	33	52	174
65	110	55	66	83	55	88	174
80	136	68	82	102	68	109	355
100	279	140	167	209	140	223	734
125	-	-	-	-	-	-	-
150	660	330	396	495	330	528	1.740
200	1.080	540	648	810	540	864	1.740

Pressure – Temperature Charts

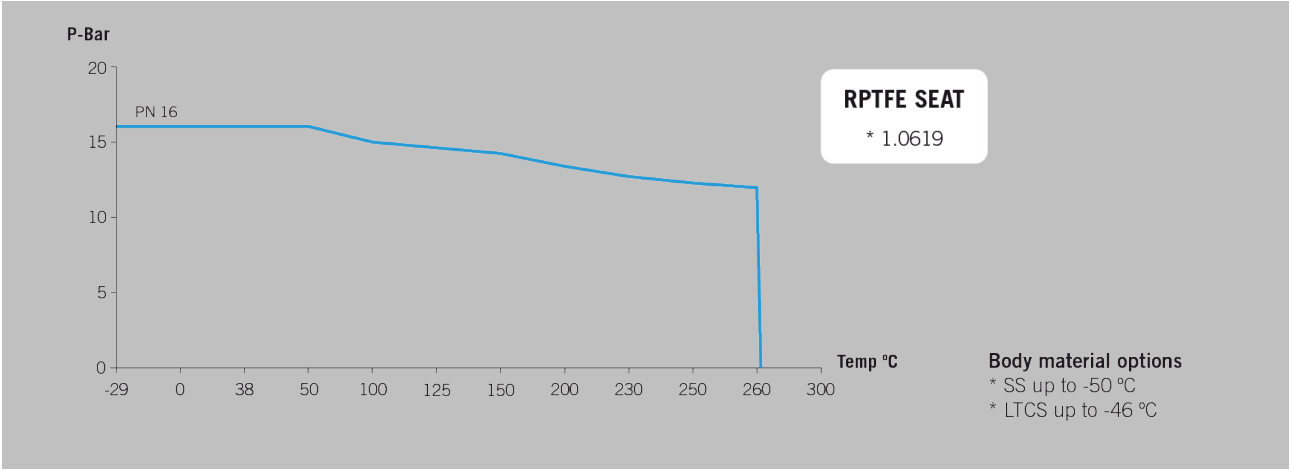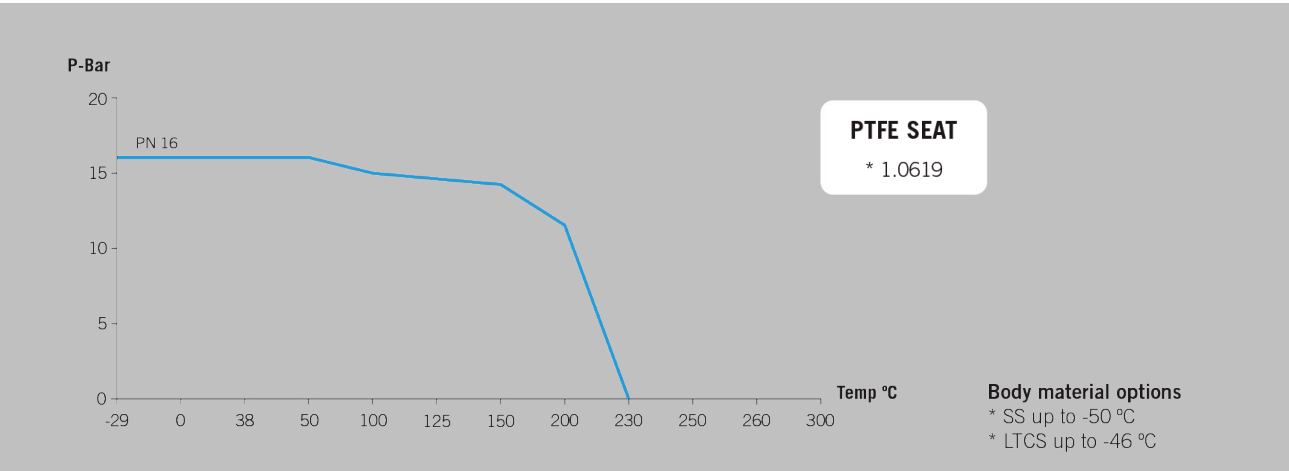


DIN Ball Valves
Flowing


3 WAY L PORT

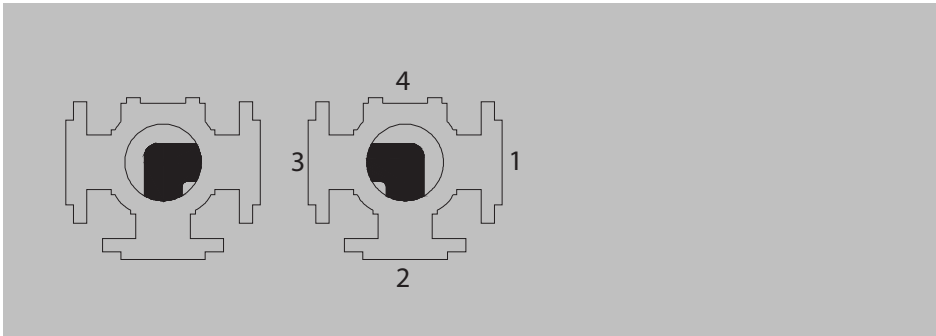


3 WAY T PORT

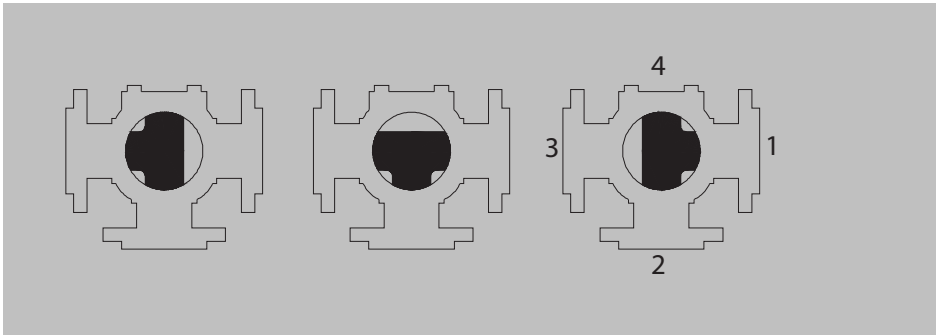

3 WAY INVERTED PORT

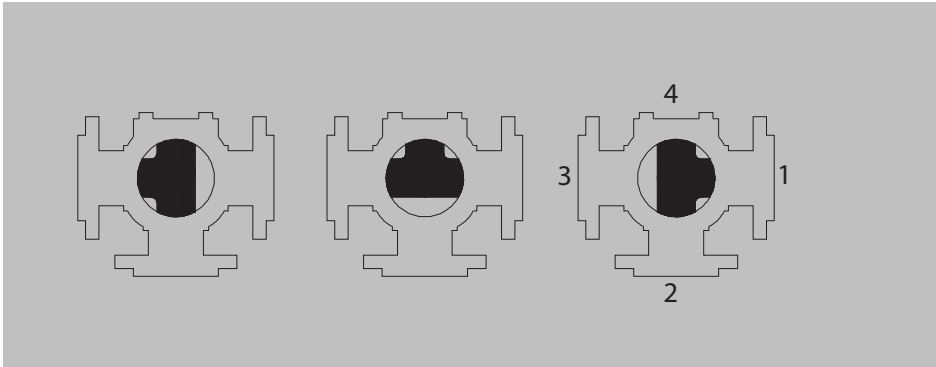

Kv Values in m³/h

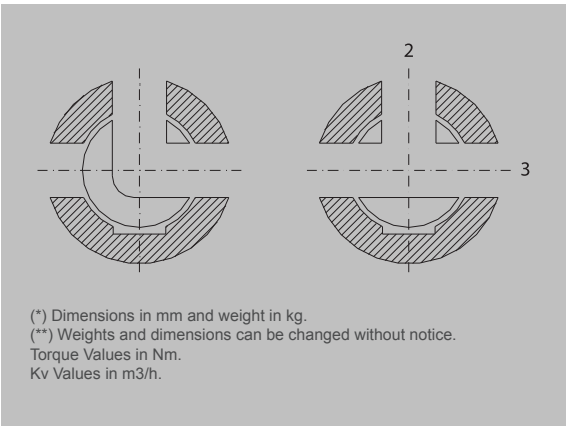

DN	PORT L	PORT T	
		PORT 2	PORT 3
25	24	22	54
40	58	59	154
50	78	80	264
65	140	142	496
80	282	316	746
100	376	378	1335
150	736	797	2583
200	1241	953	4408

DIN Ball Valves
F l o a t i n g



Simple Stem Extension




Standard Stem Extension



Other Seat materials



Stainless Steel Lever

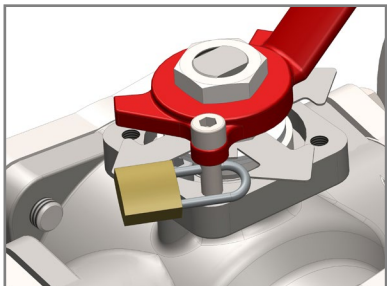

Locking Device



Manual and Declutchable
Gears



Pneumatic or Hydraulic
Scotch Yoke Actuators



Valve Automation option
available on Request